



Lexmark CX735adse

Security and performance



Lexmark CX735adse

The Lexmark CX735adse is designed for performance, security, and ease of use for mid-to-large workgroups at speeds up to 52 ppm*. Single-pass two-sided scanning, ultrasonic multifeed detection, and a 10-inch (25 cm) tablet-like touchscreen make handling your print jobs easy. Toner cartridges that yield up to 28,000/16,200 black/color pages** keep you going.

Made to last. Easy to upgrade.

- ▶ With durable steel frames, long-life components and high-yield cartridges, printers are intentionally engineered to last seven years or more.
- ▶ Long-lasting Unison™ Toner delivers consistently outstanding print quality, reduces internal wear on long-life components, and protects the print system.
- ▶ Easily upgradable to the latest apps and security features.



Faster performance and ease of use

- ▶ Scanning is fast and accurate thanks to the single-pass two-sided automatic document feeder with ultrasonic multifeed detection.
- ▶ The large, tablet-like, button-free touchscreen will help you intuitively complete every task, from the basic to the complex.
- ▶ An Intelligent Storage Drive (ISD) is standard on this model, providing faster startup, faster data retrieval and more reliability.

Make a statement with professional color

Enjoy the benefits of vibrant, professional-quality output allowing you to do more color printing in-house—saves time and money. Match corporate colors on marketing collateral and brand-sensitive text and graphics with PANTONE® calibration and Lexmark Named Color Replacement.

Secure by design

- ▶ Lexmark security features help keep your information safe—in the document, on the device, over the network and at all points in between.
- ▶ Always improving security, we now include a standard Trusted Platform Module***, which delivers authentication, system integrity checks, and cryptographic capabilities to create a unique digital system fingerprint.

Sustainability matters

- ▶ Designed for the circular economy.
- ▶ Automatic two-sided printing is standard, along with built-in energy-saving modes that help support ratings of EPEAT® Silver and ENERGY STAR® certified.
- ▶ The award-winning Lexmark Cartridge Collection Program (LCCP) and Lexmark Equipment Collection Program (LECP) minimize waste and support recycling (availability varies by country).

Power up with IoT

- ▶ Sophisticated, IoT-enabled printers are loaded with sensors that continuously monitor hundreds of data points.
- ▶ When you connect your device to Lexmark Cloud Services, you can optimize performance and uptime with additional features like predictive service and automatic supplies replenishment.


This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

* Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: www.lexmark.com/ISOspeeds.

** Average continuous black or continuous composite color (CMY) declared yield in one-sided (simplex) mode up to this number of pages in accordance with ISO/IEC 19798. Actual yield will vary considerably based upon many factors. See www.lexmark.com/yields for more information. In demonstration of circular economy principles, genuine Lexmark supplies with Unison™ Toner may contain components recovered from the Lexmark Cartridge Collection Program (LCCP).

*** The Trusted Platform Module (TPM) is not available in some countries.

Lexmark CX735adse

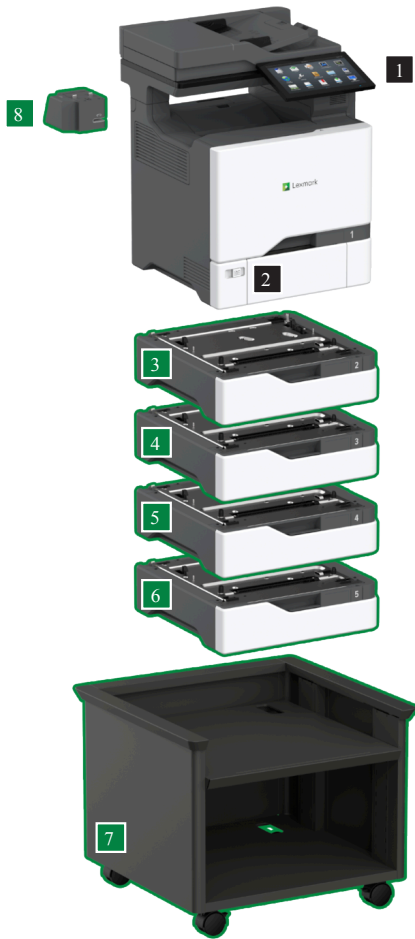

- 1 **Multifunction product with 10-inch (25 cm) touch screen**
24.44 x 18.85 x 20.9 in.
621 x 479 x 533 mm
- 2 **550-Sheet tray with 100-sheet multipurpose feeder**
Dimensions included as part of base model
- 3 **550-Sheet Tray**
4.7 x 18.23 x 19 in.
119 x 463 x 483 mm
- 4 **550-Sheet Tray**
4.7 x 18.23 x 19 in.
119 x 463 x 483 mm

- 5 **550-Sheet Tray**
4.7 x 18.23 x 19 in.
119 x 463 x 483 mm
- 6 **550-Sheet Tray**
4.7 x 18.23 x 19 in.
119 x 463 x 483 mm
- 7 **Adjustable Stand**
20.5 x 25.7 x 24.6 in.
521 x 653 x 625 mm
- 8 **Convenience Stapler LV**
3.23 x 4.29 x 4.77 in.

- Standard
- Optional

P/N 47C9600	Hardware Lexmark CX735adse
P/N 71C0W00	Supplies Lexmark CS/CX730, 735, C/ XC4342, C4352 170K Waste Container
71C0Z10	Lexmark CS/CX730, 735, C/ XC4342, C/XC4352 Black 150K Imaging Unit
71C0Z50	Lexmark CS/CX730, 735, C/ XC4342, C/XC4352 Color (CMY) 150K Imaging Unit
71C10C0	Lexmark CS/CX730, 735 Cyan Return Program 5K Toner Cartridge
71C10K0	Lexmark CS/CX730, 735 Black Return Program 5K Toner Cartridge
71C10M0	Lexmark CS/CX730, 735 Magenta Return Program 5K Toner Cartridge
71C10Y0	Lexmark CS/CX730, 735 Yellow Return Program 5K Toner Cartridge
81C0X10	Lexmark CX735 Black 28K Toner Cartridge
81C0X20	Lexmark CX735 Cyan 16.2K Toner Cartridge
81C0X30	Lexmark CX735 Magenta 16.2K Toner Cartridge
81C0X40	Lexmark CX735 Yellow 16.2K Toner Cartridge
81C1XC0	Lexmark CX735 Cyan Return Program 16.2K Toner Cartridge
81C1XK0	Lexmark CX735 Black Return Program 28K Toner Cartridge
81C1XM0	Lexmark CX735 Magenta Return Program 16.2K Toner Cartridge
81C1XY0	Lexmark CX735 Yellow Return Program 16.2K Toner Cartridge
P/N 40C2100 47C4500	Paper Handling 550-Sheet Tray Convenience Stapler
P/N 27X0400 57X0070	Memory Options 500+ GB Hard Disk Removable Hard Disk Enclosure Kit
P/N 57X0300 57X0301	Application Solutions Contact Authentication Device Contactless Authentication Device
82S1203 82S1204	IPDS License Bar Code License
P/N 1021294 27X0823	Connectivity USB Cable (2-meter) MarkNet N8370 Wireless for CS720, CS725, CX725
27X6410	Lexmark MarkNet N8372 802.11 a/b/g/n/ac Wireless Print Server
SPD0001	Surge Protective Device, 110-120V
P/N 40C2300	Furniture Adjustable Stand

Supports up to four optional 550-sheet trays.

All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at http://www.lexmark.com/publications/furniture_safety/

Product Specifications		Lexmark CX735adse	
Printing			
Display	58xmark e-Task 10.1-inch (25.6 cm) color touch s6B8A		
Print Speed	Up to: Black: 52 ppm ¹ (L8G8E) / Color: 52 ppm ¹ (L8G8E)		
Time to First P4:8	As f4F t as: Black: 5.6 s86onds / Color: 6.1 s86BA7F		
Print R8FB7HG<BA	Black: 1200 x 1200 dpi, 4800 CQ (2400 x 600 dpi) / Color: 4800 CQ (2400 x 600 dpi), 1200 x 1200 dpi		
% 8@BEL	+GA74E d: 2048 MB / Maximum: 2048 MB		
4E d Disk	IAgelligent StBEdge Drive included; Magnetic Hard Disk (BCtional)		
* 86ommeded Monthly Page VB7H@8	2000 - 20000 pages ²		
% aximum Monthly Duty CL678	Up to: 150000 pages per month ³		
Copying			
CBCy Speed	Up to: Black: 52 cpm ¹ (L8G8E) / Color: 52 cpm ¹ (L8G8E)		
Time to First CBCL	As f4F t as: Black: 5.7 s86onds / Color: 6.3 s86BA7F		
Scanning			
+6anner Type / ADF Sc4A	Flatbed s6anner with ADF / DADF (single pass Duplex)		
A4/Ltr Duplex Scan Speed	Up to: Black: 98 / 104 sides per minute / Color: 98 / 104 sides per minut8		
A4/Ltr Simplex Scan Speed	Up to: Black: 49 / 52 sides per minute / Color: 49 / 52 sides per minut8		
ADF Paper Input C4C46<CL	Up to: 100 pages 20 lb or 75 gsm bond		
Faxing			
% odem Speed	!, U T.30, V.34 Half-DupleK, 33.6 Kbps		
Supplies⁴			
\$4Fer C4Etridge Y<877F	up to: 28 000 ⁵ -page Black ExG8 High Yield C4Etridge / up to: 16 200 ⁵ -page Color (CM1) ExG8 High Yield C4EGE<7:8F		
Imaging Unit EsG<@46d Y<877	Up to: 150000 pages, based on 3 av8Eage lett8E/A4-size pages per print job and ~ 5% cBI 8E4:8 ⁶		
C4Etridge(F) Shipping with PrB7H6G	5 000 ⁵ -page Black and Color (CM1#) Return PR:B am Toner C4EGE<7:8F ⁵		
Paper Handling			
Included Paper Handling	100-Sheet MH7G<CHEC8F F8878E, Int8:E 4Ged DupleK, 300-Sheet Output Bin, 550-Sheet Input		
'C tional Paper Handling	550-Sheet TE4L		
(aper Input C4C46<CL	Up to: +GA74E d: 650 pages 20 lb or 75 gsm bond / Maximum: 2850 pages 20 lb or 75 gsm bond		
(aper Output C4C46<CL	Up to: +GA74E d: 300 pages 20 lb or 75 gsm bond / Maximum: 300 pages 20 lb or 75 gsm bond		
% edia Types Suppor87	. <Ayl Labels, Banner P4C8E, Paper Labels, C4Ed StB6>, Plain P4C8E, Enl elopes, R89er to the Paper & Specialty Media Guide		
% edia Sizes Suppor87	A6, Oficio, 7 3/4 Enl 87BC8, 9 Enl 87BC8, JIS-B5, A4, Legal, A5, L8G8E, B5 Enl 87BC8, St4G8@8AG, C5 Enl 87BC8, Ex86HG<8, Univ8EFal, DL Enl 87BC8, FB7<8 10 Enl 87BC8		
General Information⁷			
+GA74E d PBEGF	Gigabit Ethernet (10/100/1000), F8ont USB 2.0 Specification Hi-Speed C8Etified port (, ype A), Rear Hi-Speed USB PBET Compatible with USB 2.0 Specification (, ype A), USB 2.0 Specification Hi-Speed C8Etified (, ype B), One Internal C4Ed Slog		
'C tional NetU ork PBEGF	!AGernal MarkNet N8370 802.11b/g/n/a Wireless, NFC		
8B<Fe L8I 87	'C8E ating: 53 dBA (Print) / 56 dBA (CBCy) / 51 dBA (+6an)		
Specified Operating Enl<BA@8AG	H@<7<Gy: 8 to 80% R874G<8 Humidity / T8@C8E 4GH8: 10 to 32°C (50 to 90°F) / Altitude: 0 - 2896 M8Gers (9,500 F88G)		
S<@<6d W4EE4AGL	See St4Gement of Limited W4EE4AGy: 1-1ear Onsite Serl<68, NeKt Business D4L		
+<8 / W8<:;G	H x W x D: 24.44 x 18.85 x 20.9 in. / 87.08 lb.		
ENERGY S, AR TLC<6al ElectricitL	TEC: 0.69 kiloj 4GGhours per w88>		
CBAFH@CG<BA			

All information is subject to change without noG<8. L8xmark is not liable for any errors or omissions.

¹ Print and cBCy speeds measured in ac6BE74A6 e with ISO/IEC 24734 and ISO/IEC 24735 r8FC86G<lely (ESA,). For more information see: wJ J .leK@4E>.6om/ISOspeeds.

² "R86ommeded Monthly Page Volume" is a range of pages that helps cus8omers el 47H4G L8K@4E>8 product o99erings based on the av8Eage number of pages cus8omers plan tB print on the del<6e each month. L8xmark r86ommends that the number of pages per month be within the sG4Ged range for optimum del<6e per8E@4A6 8, based on f46Gors including: supplies r8C746 ement int8EI als, paper loading int8EI als, speed, and tLc<6al cus8omer us4:8 . ³ "Maximum Monthly Duty CLcle" is defined as the maximum number of pages a del<68 6ould deliver in a month using a multishift operation. This metric prBvides a cB@C4E<Fon of rB5HFtness in relation to other L8xmark printers and MFPs. ⁴ (Eoduct functions only with BC746 ement c4Etridges designed for use in a specific geogr4C;<6 al region. See wJ J .leK@4E>.6om/regions for more details. ⁵ Al 8Eage continuous black or continuous cB@CBF<G8 CM1 78674Eed c4Etridge yield up to this number of sG4A74E d pages in ac6BE74A6 e with ISO/IEC 19798. ⁶ Actual Yield may v4Ey based on other f46Gors such as del<6e speed, paper size and 9eed orientation, toner cBI 8E4:8 , tray sBHE68, per68AGage of black-only printing and av8Eage print job cB@C78 K<G ⁷ (E<A@rs are sold subject to c8EGain lic8AF8/agreement conditions. See wJ J .leK@4E>.6om/print8E7<8AF8 for details.

Printzone.

1300 782 636

This is a Class A del<6e ac6BE8ding to international electromagnetic emissions sG4A74E ds (i.8. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-7B@8F tic enl<6onments. Use of a Class A product in residential/domestic enl<6onments may c4HF8 int8E8E8A6e to radio cB@HA<6ations and r8DH<8 cBEB6G<8 measures.

© 2022 L exmark . All rights r eserved.

Lexmark , the L exmark logo and Unis on ar e tr ademark s of L exmark Int ernational, Inc ., r egis tered in the Unit ed S tat es and/or o ther c ountries .

Apple and AirPrint ar e tr ademark s of Apple Inc ., r egis tered in the U .S. and o ther c ountries and r egions . M OPRIA , the M opria L ogo , and the M opria Allianc e TM word mark and logo ar e r egis tered and/or un r egis tered trademark s and service mark s of M opria Allianc e, Inc . in the Unit ed S tat es and o ther c ountries . Unauthorized us e is str ictly pr ohibit ed. ENER GY STAR and the ENER GY S TAR mark ar e r egis tered tr ademark s owned b y the U .S. Environm ent al Pr otection A gency . EPE AT is a tr ademark o f the Gr een Electr onics C ouncil in the Unit ed Stat es and o ther c ountries . PANT ONE is the pr oper ty of f Pant one LL C. All o ther tr ademark s ar e the pr oper ty of th eir r espectiv e ow ners .

This pr oduct includes s oftwar e developed b y the OpenS SL Pr oject f or us e in the Open S SL T oolkit (<http://www.openssl.org/>).

