



# Printzone.

## How to Disable Automatic Firmware Updates in Select HP Printers


In the HP Color LaserJet Pro M454, M479 MFP and related printers.

On touchscreen printers: - Non-touchscreen instructions further down

- 1) See the icons on the top, click the Setup gear icon.

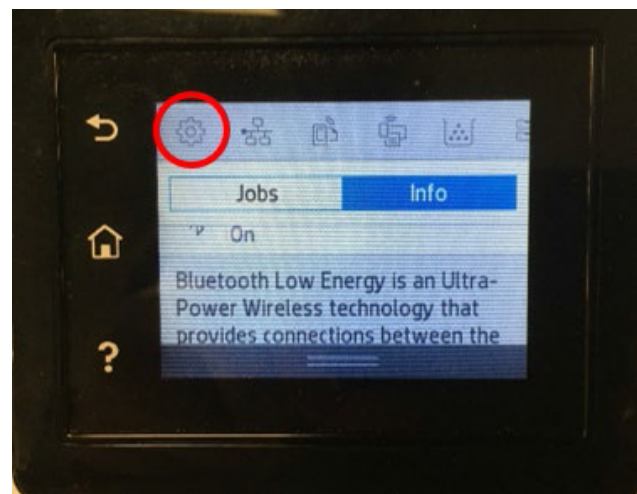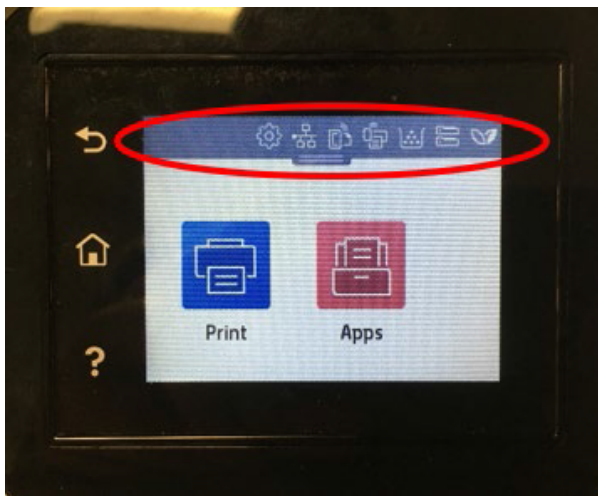


- 2) In Setup, click the the Printer Maintenance tab.

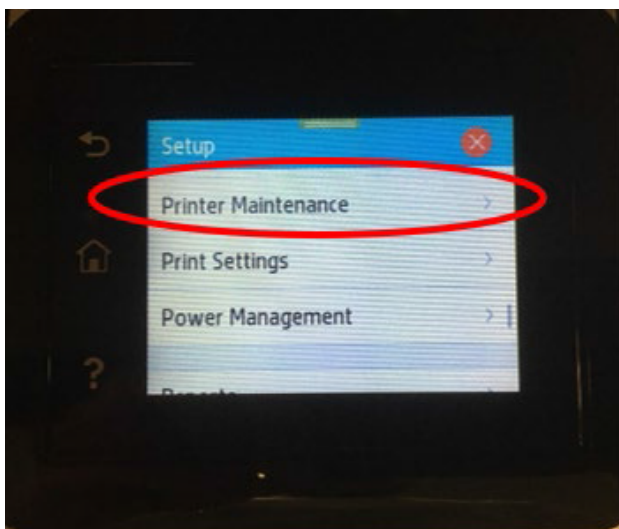


# Printzone.

3) Locate and press Update the Printer.

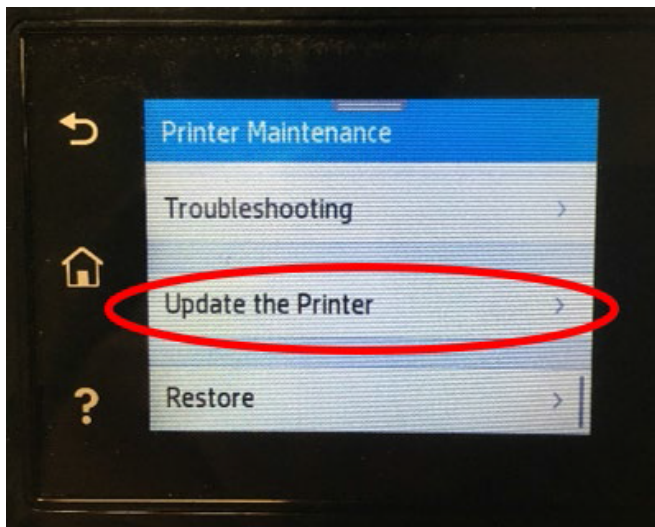


4) Find and press Printer Update Options.

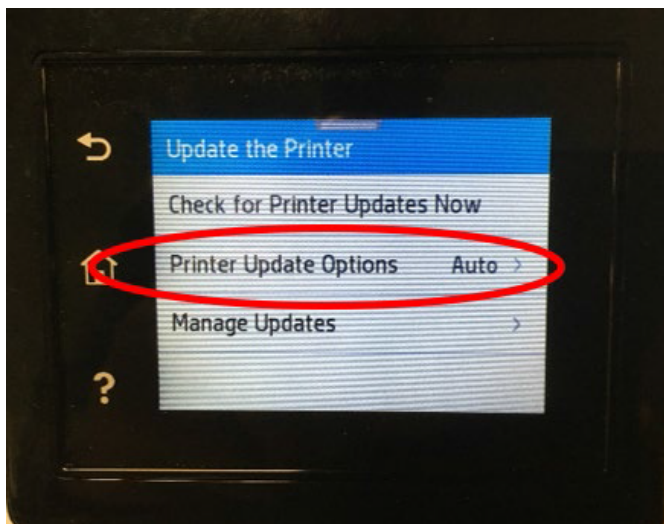


# Printzone.


5) Click Do Not Check.

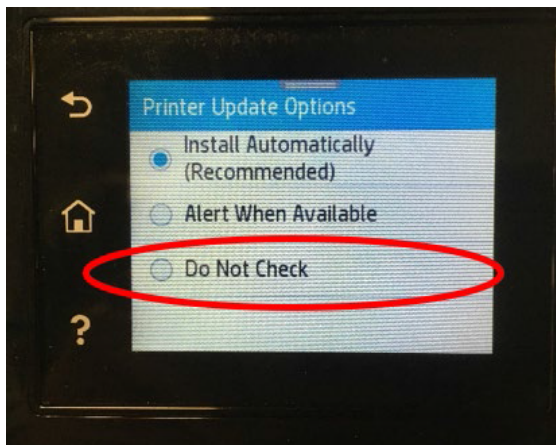

6) A pop-up screen will appear. Click No.

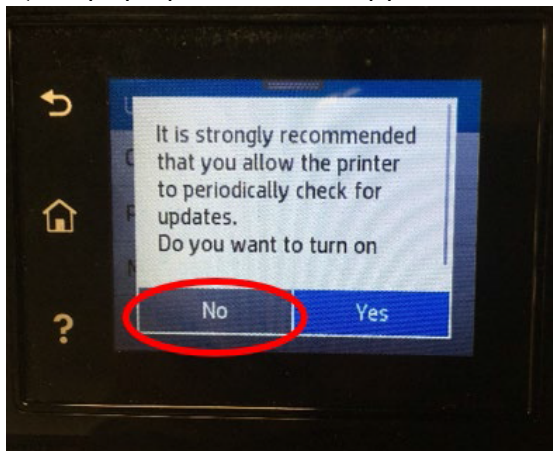


7) From the Update the Printer screen, click Manage Update.

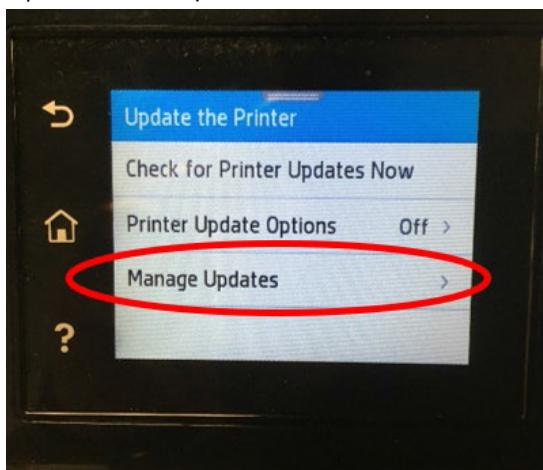


# Printzone.


8) Select Allow Update.

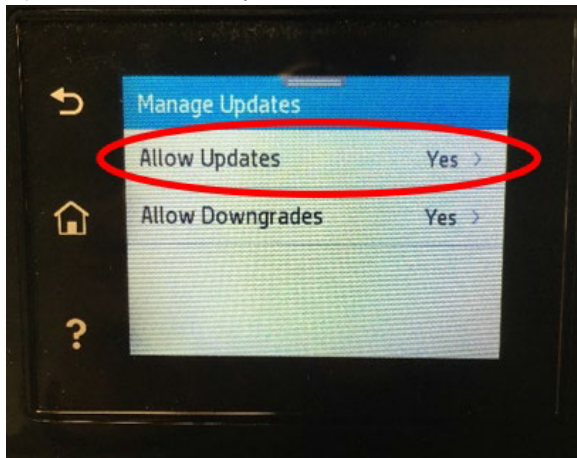

9) Select No.

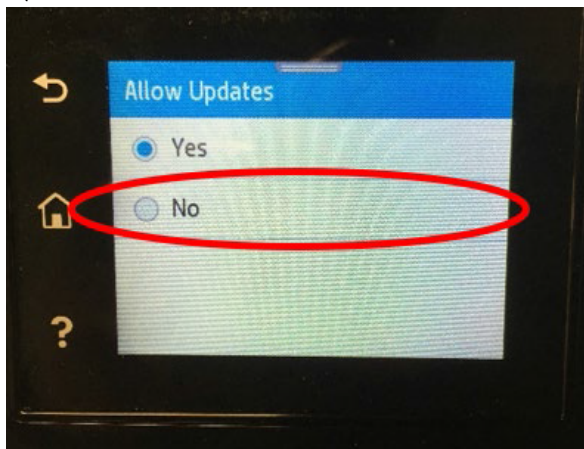


10) A pop-up screen will appear, press Confirm.

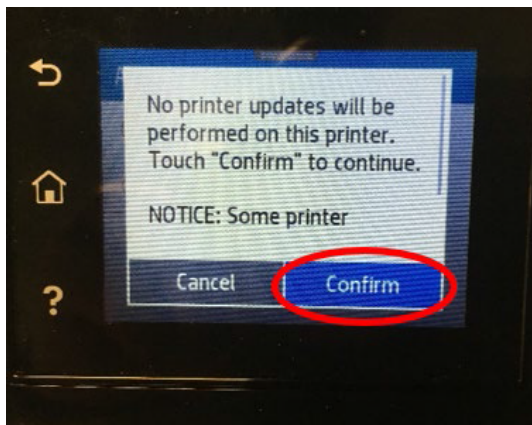


# Printzone.


11) From the Manage Update screen, select Allow Downgrades.

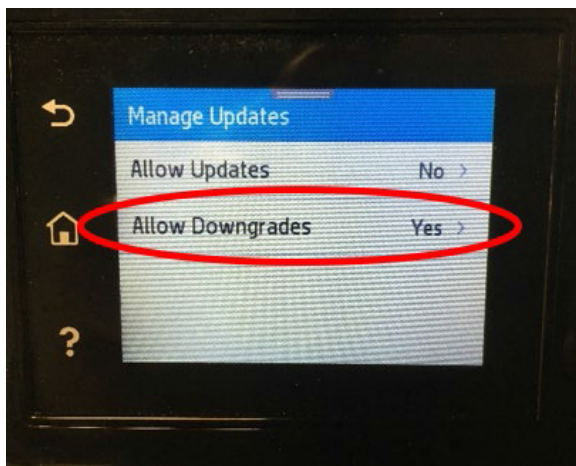

12) Select No.

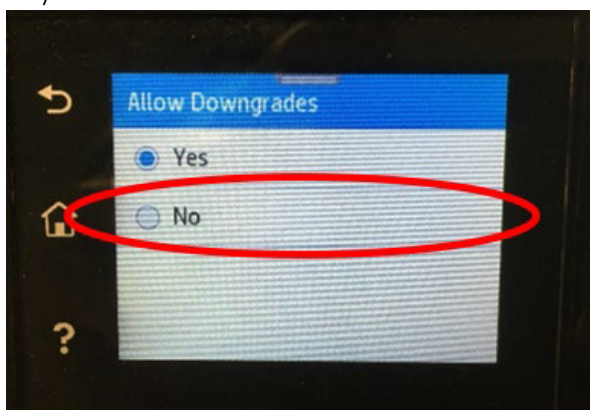

13) The Manage Update screen should look as follows:


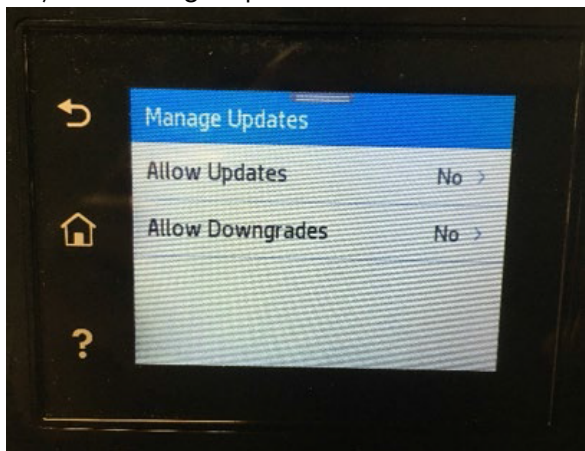


This printer is now disabled for automatic firmware updates!


# Printzone.

## Non-Touchscreen Printer:

- 1) When the printer is on, use the arrow buttons to access the main menu, then click Setup.

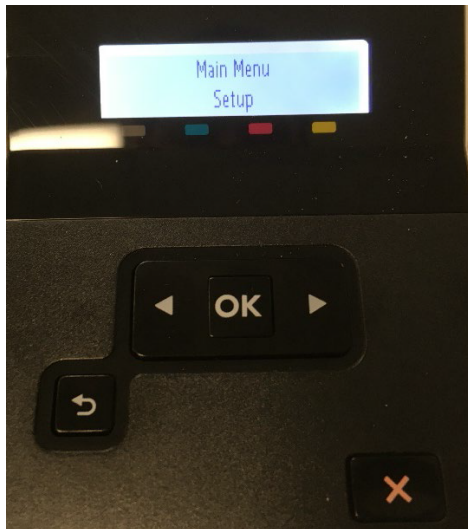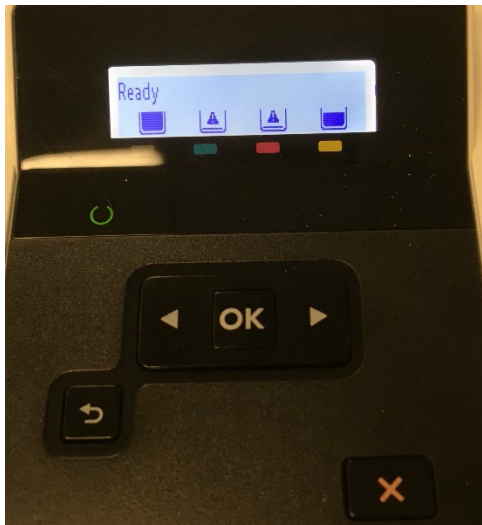


- 2) From Setup, use the arrow buttons to scroll to Printer Maintenance and click the OK button.

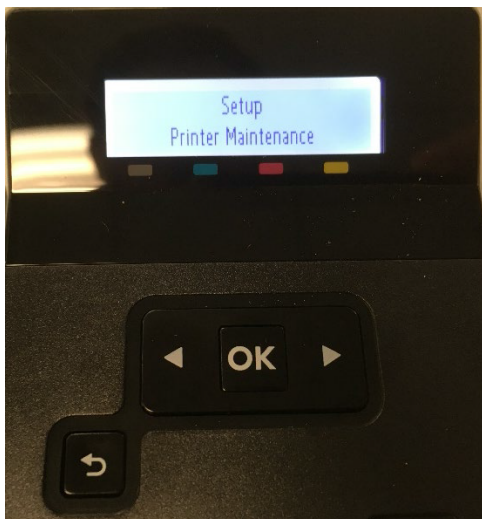


# Printzone.

3) Find the Update Firmware option and click the OK button.

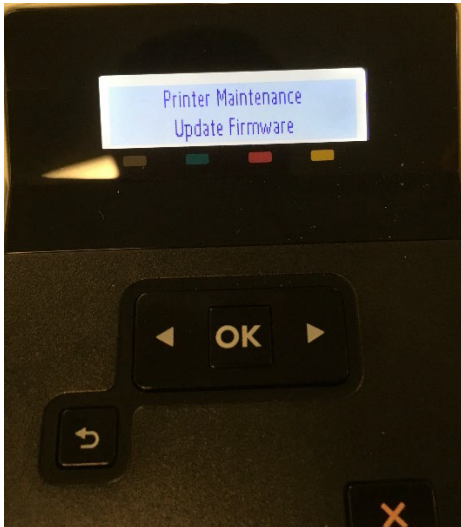


4) Click OK to continue.


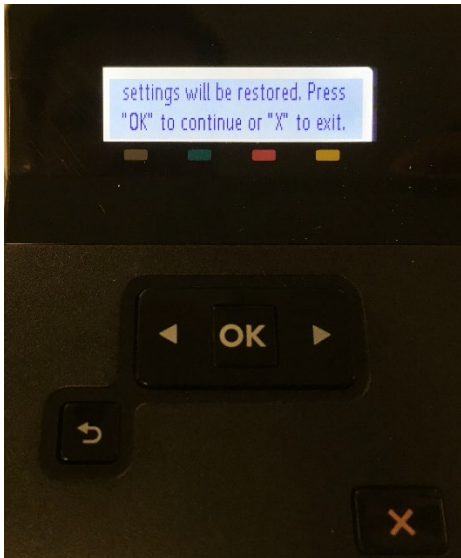


# Printzone.

5) Scroll to Update Options and press OK.

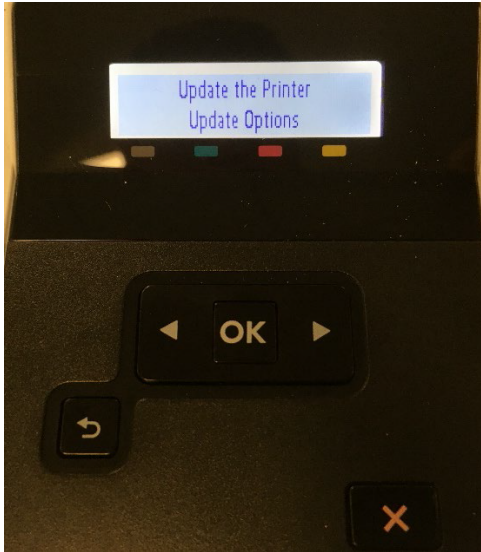


6) Scroll to Off and press OK.

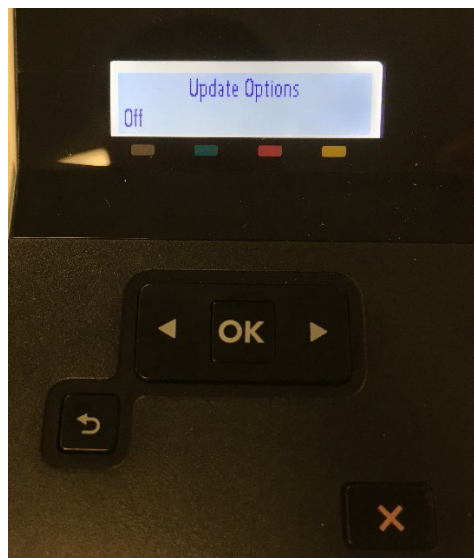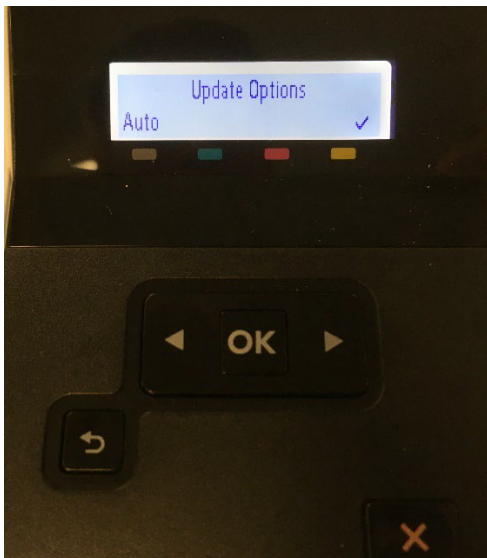


# Printzone.

7) Press X to exit.

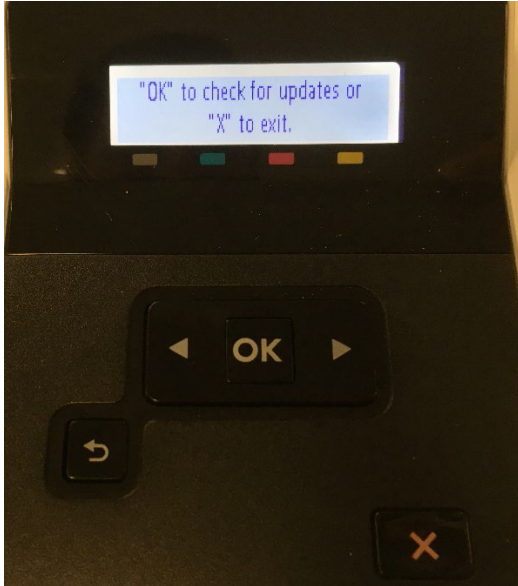


8) From the Update the Printer screen, scroll to Manage Updates and click OK.

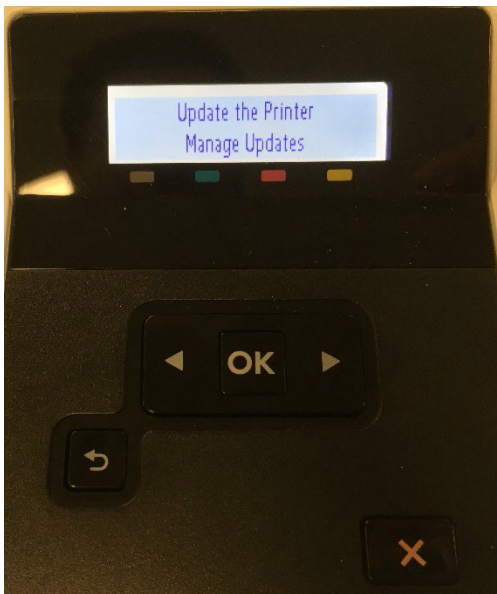


# Printzone.

9) Scroll to Allow Updates, click OK.

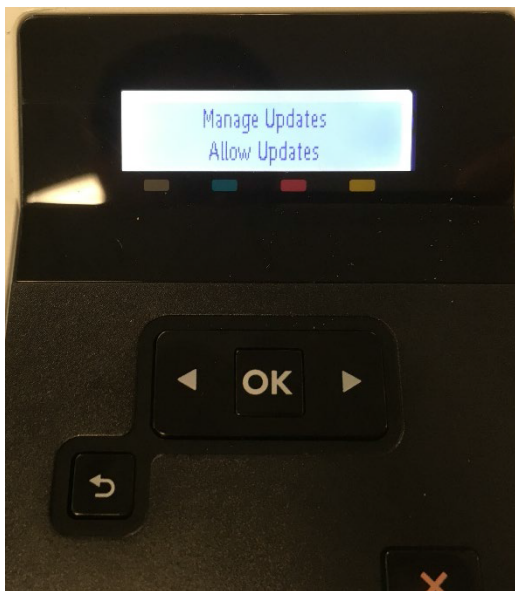


10) The Allow Updates screen will have Yes automatically checked. Scroll to No and click OK.

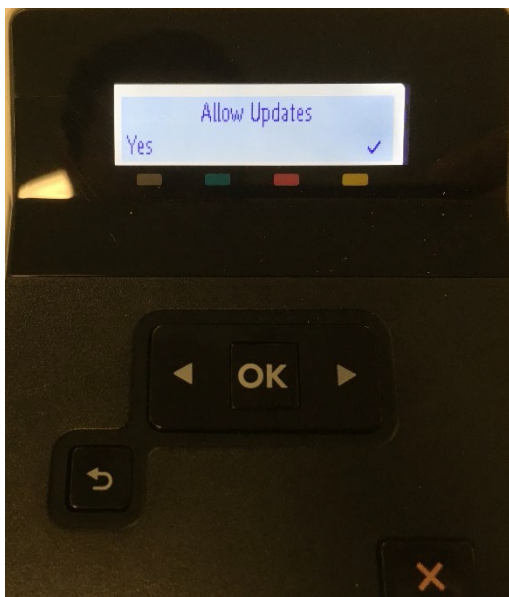


# Printzone.

11) A pop-up screen will appear. Press X.

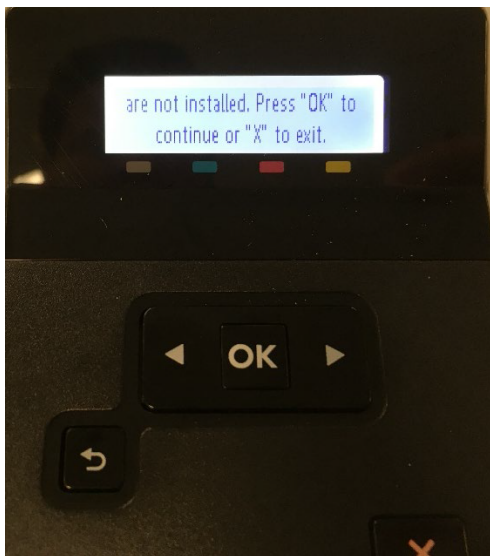


12) From the Manage Updates screen, scroll to Allow Downgrades and click OK.

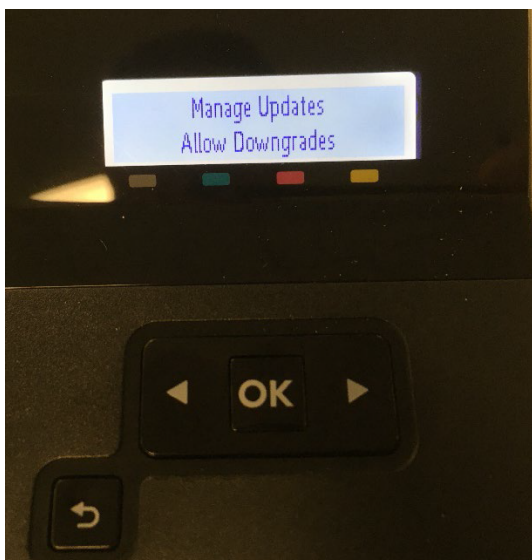

# Printzone.

13) The printer will be automatically populated with Yes. Scroll to No and press OK.

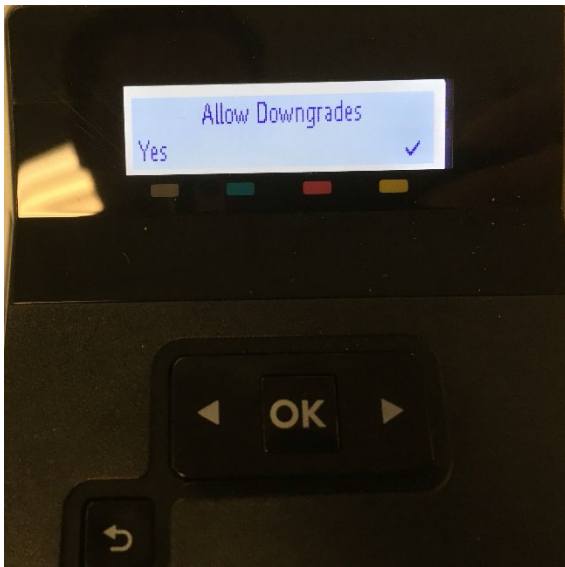

This printer is now disabled from making automatic firmware updates!